

SEA BELUGA

TECHNICAL SPECIFICATIONS

GENERAL

| | |
|------------------|---|
| Type | Multipurpose vessel |
| Classification | Bureau Veritas Hull • Mach • / Unrestricted Navigation / AUT-UMS (SS) - Ice Class 1D |
| MMSI | 246710000 |
| IMO number | 9528316 |
| Year built | 2010 - Damen Hardinxveld, NL |
| Flag | Dutch |
| Port of registry | Vlissingen |
| Call sign | PCBJ |

DIMENSIONS

| | |
|-------------------|---------|
| Length | 25,80 m |
| Breath overall | 10,00 m |
| Minimum draft | 2,50 m |
| Operational Draft | 2,72 m |
| Maximum draft | 2,80 m |
| Minimum air draft | 9,10 m |
| Maximum air draft | 15,70 m |
| Gross tonnage | 230 t |
| Net tonnage | 69 t |

TANK CAPACITY

| | |
|-----------------|---------------------|
| Fuel oil | 79,8 m ³ |
| Fresh water | 40,1 m ³ |
| Lubrication oil | 2,4 m ³ |
| Hydraulic oil | 0,5 m ³ |
| Dirty oil | 1,7 m ³ |
| Sewage | 4,4 m ³ |
| Bilge water | 2,4 m ³ |

PERFORMANCE

| | |
|----------------|-------------|
| BollardPull | 27,2 t |
| Maximum speed | 10,50 knots |
| Economic speed | 8,00 knots |
| Horse power | 2028 |

PROPULSION SYSTEM

| | |
|--------------|---------------------------------------|
| Main engines | 2x CAT 3508 BTA |
| Total power | 1.492 KW / 2028 bhp |
| Propulsion | 2x Solid screw propeller LB5, 295 rpm |
| Bowthruster | Veth Jet 150 kW |

DECK CRANE

| | |
|----------|-------------------|
| Type | Heila HLRM 140-3S |
| Capacity | 10,00 t @ 12,30 m |

DECK EQUIPMENT

| | |
|----------------|-----------------------------|
| Free deckspace | 52,0 m ² |
| Deck strength | 5,0 t/m ² |
| Tugger winch | N/A |
| Pushbow | Full length rubber fendered |

AUXILIARY EQUIPMENT

| | |
|---------------------------|----------------------|
| Main generator sets | 2x CAT C4.4 |
| Fuel oil transfer pump | 12 m ³ /h |
| Fresh water transfer pump | 12 m ³ /h |
| Fresh water maker | N/A |
| Air compressor | ALUP 5,5 kW 10 bar |
| Powerpack | 1x CAT C9 |

ACCOMMODATION

| | |
|-----------------|-----|
| Persons | 6 |
| Single cabin | 2 |
| Double cabin | 2 |
| Air conditioned | Yes |

TOWING EN ANCHOR HANDLING


| | |
|-----------------------|---|
| Towing winch | Kraaijeveld 60 t / 70 t (pull/hold) 700 m x 38 mm |
| Anchor Handling Winch | 60 t / 70 t (pull/hold) 200 m x 44 mm |
| Towing pins | Shark Jaw Fork SWL 50 t |
| Stern roller | SWL 100t |





SEACONTRACTORS

SEACONTRACTORS | VISSERIJKADE 95 | 4382 ZA VLISSINGEN | THE NETHERLANDS | T: +31 (0) 118 410 520 | WWW.SEACONTRACTORS.COM | INFO@SEACONTRACTORS.COM

The information contained in this data sheet is for guidance purposes only and may be subject to changes

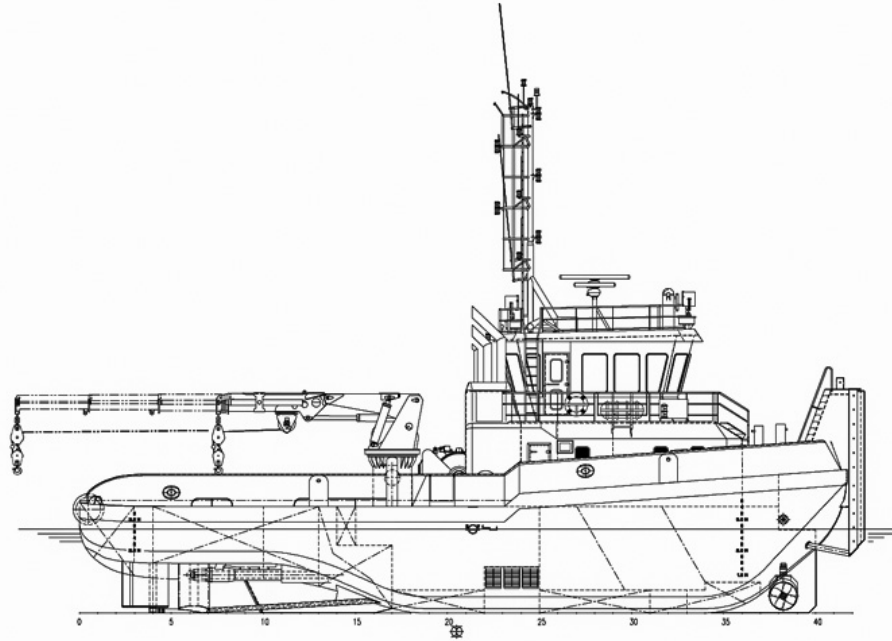

SIDE VIEW

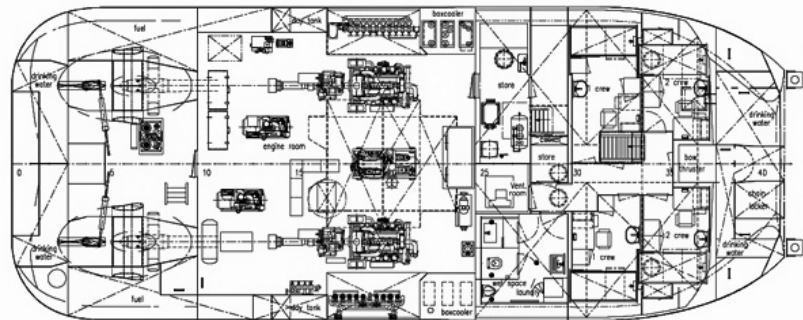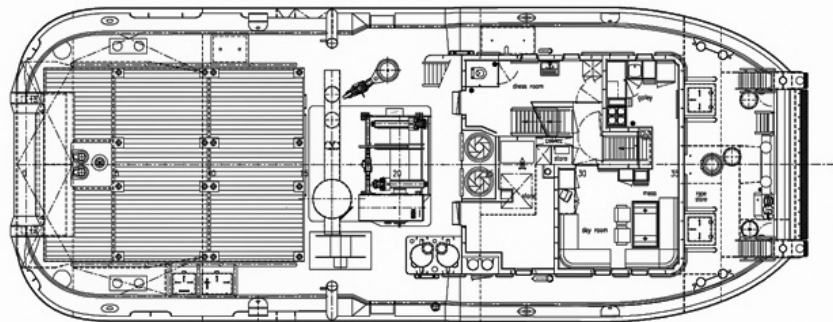

TOP VIEW DECK LEVEL