

SEA GOLF

TECHNICAL SPECIFICATIONS

GENERAL

Type	Shoalbuster 3209
Classification	Bureau Veritas • Hull • Mach • Unrestricted navigation / AUT-UMS - Tug - Fire Fighting ship 1 - Water spraying
MMSI	244640000
IMO number	9901453
Year built	2020 - Damen Sharjah
Flag	Dutch
Port of registry	Vlissingen
Call sign	PCSP

DIMENSIONS

Length	32,27 m
Breath overall	9,35 m
Minimum draft	2,90 m
Operational Draft	3,00 m
Maximum draft	3,20 m
Minimum air draft	10,30 m
Maximum air draft	16,85 m
Gross tonnage	335 t
Net tonnage	100 t

TANK CAPACITY

Fuel oil	215,0 m ³
Fresh water	40,0 m ³
Lubrication oil	7,3 m ³
Hydraulic oil	3,0 m ³
Dirty oil	4,3 m ³
Sewage	3,3 m ³
Bilge water	4,3 m ³

PERFORMANCE

BollardPull	49,8 t
Maximum speed	12,30 knots
Economic speed	8,50 knots
Horse power	3600

PROPULSION SYSTEM

Main engines	2x CAT 3512C TTA/HD
Total power	2.610 kW / 3500 bhp
Propulsion	2x Promarin fixed pitch propellers
Bowthruster	350 bhp, hydraulic driven

FIFI

System	FIFI 1
Type	FFS
Capacity	2x 1400 m ³ / hr

DECK CRANE

Type	Heila HLRM170-4SL
Capacity	7,9 t @ 15,93 m

DECK EQUIPMENT

Free deckspace	80,0 m ²
Deck strength	5,0 t/m m ²
Tugger winch	Dromec 12 t
Pushbow	Full length rubber fendered

AUXILIARY EQUIPMENT

Main generator sets	2x CAT C4.4 TA
Fuel oil transfer pump	50m ³ /h @ 4.8 bar
Fresh water transfer pump	50m ³ /h @ 4.8 bar
Fresh water maker	N/A
Air compressor	1x ABAC 39m ³ /h 11 bar
Powerpack	1x CAT C18 TA


ACCOMMODATION

Persons	11
Single cabin	1
Double cabin	5
Air conditioned	Yes


TOWING EN ANCHOR HANDLING

Towing winch	Kraaijeveld 50 t / 150 t (pull/hold) 800 m x 44 mm
Anchor Handling Winch	100 t / 150 t (pull/hold) 720 m x 44 mm
Towing pins	WK-Hydraulics SWL 50 t
Stern roller	SWL 100t




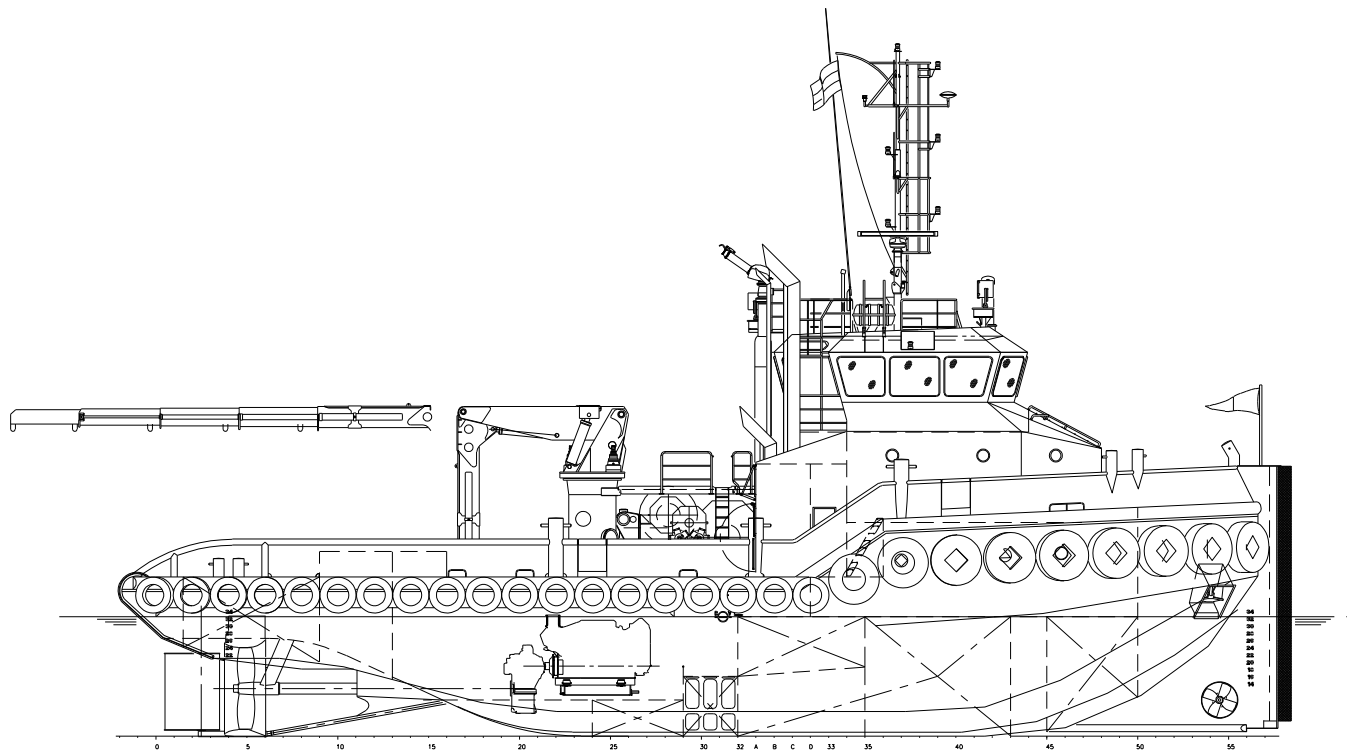

Forecandledeck

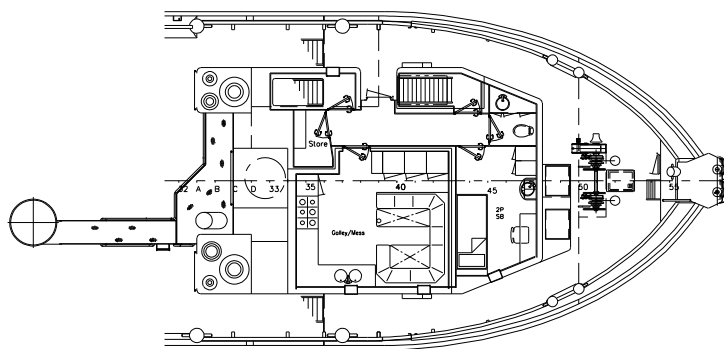

Maindeck

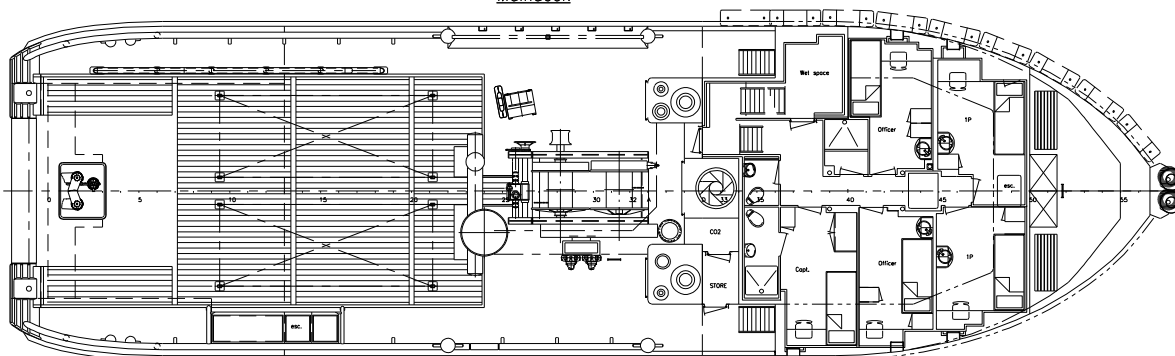

Below maindeck

