



SEA JULIETT

TECHNICAL SPECIFICATIONS

GENERAL

| | |
|------------------|---|
| Type | Shoalbuster 3209 |
| Classification | Bureau Veritas • Hull • Mach • Unrestricted navigation / AUT-UMS - Tug - Fire Fighting ship 1 - Water spraying |
| MMSI | 244181000 |
| IMO number | 9778387 |
| Year built | 2019 - Damen Hardinxveld, NL |
| Flag | Dutch |
| Port of registry | Vlissingen |
| Call sign | PCRG |

DIMENSIONS

| | |
|-------------------|---------|
| Length | 32,27 m |
| Breath overall | 9,35 m |
| Minimum draft | 2,90 m |
| Operational Draft | 3,00 m |
| Maximum draft | 3,20 m |
| Minimum air draft | 10,30 m |
| Maximum air draft | 16,85 m |
| Gross tonnage | 335 t |
| Net tonnage | 100 t |

TANK CAPACITY

| | |
|-----------------|----------------------|
| Fuel oil | 215,0 m ³ |
| Fresh water | 40,0 m ³ |
| Lubrication oil | 7,3 m ³ |
| Hydraulic oil | 3,1 m ³ |
| Dirty oil | 4,3 m ³ |
| Sewage | 3,3 m ³ |
| Bilge water | 4,3 m ³ |

PERFORMANCE

| | |
|----------------|-------------|
| BollardPull | 47,0 t |
| Maximum speed | 11,00 knots |
| Economic speed | 8,50 knots |
| Horse power | 3500 |

PROPULSION SYSTEM

| | |
|--------------|-----------------------------------|
| Main engines | 2x CAT 3512C TTA/HD |
| Total power | 2,610 kW / 3500 bhp |
| Propulsion | 2x Promarin fixed pitch propeller |
| Bowthruster | 350 bhp, hydraulic driven |

FIFI

| | |
|----------|-----------------------------|
| System | FFS 1200 |
| Type | FFS 1200 |
| Capacity | 2x 1400 m ³ / hr |

DECK CRANE

| | |
|----------|--------------------|
| Type | Heila HLRM 170-4SL |
| Capacity | 7,9t @ 15,90m |

DECK EQUIPMENT

| | |
|----------------|-----------------------------|
| Free deckspace | 80,0 m ² |
| Deck strength | 5,0 t/m m ² |
| Tugger winch | Dromec 12 t |
| Pushbow | Full length rubber fendered |

AUXILIARY EQUIPMENT

| | |
|---------------------------|---|
| Main generator sets | 2x CAT 4.4 TA |
| Fuel oil transfer pump | 50m ³ /h @ 4.8 bar |
| Fresh water transfer pump | 50m ³ /h @ 4.8 bar |
| Fresh water maker | N/A |
| Air compressor | 2x ABAC 2 times 19m ³ /h 9 bar |
| Powerpack | 1x CAT C18 TAB |

ACCOMMODATION

| | |
|-----------------|-----|
| Persons | 10 |
| Single cabin | 2 |
| Double cabin | 4 |
| Air conditioned | Yes |

TOWING EN ANCHOR HANDLING


| | |
|-----------------------|--|
| Towing winch | DMT Waterfall 50 t / 150 t (pull/hold) 800 m x 44 mm |
| Anchor Handling Winch | 100 t / 150 t (pull/hold) 720 m x 44 mm |
| Towing pins | WK-Hydraulics SWL 50 t |
| Stern roller | SWL 100t |




SEACONTRACTORS

SEACONTRACTORS | VISSERIJKADE 95 | 4382 ZA VLISSINGEN | THE NETHERLANDS | T: +31 (0) 118 410 520 | WWW.SEACONTRACTORS.COM | INFO@SEACONTRACTORS.COM

The information contained in this data sheet is for guidance purposes only and may be subject to changes

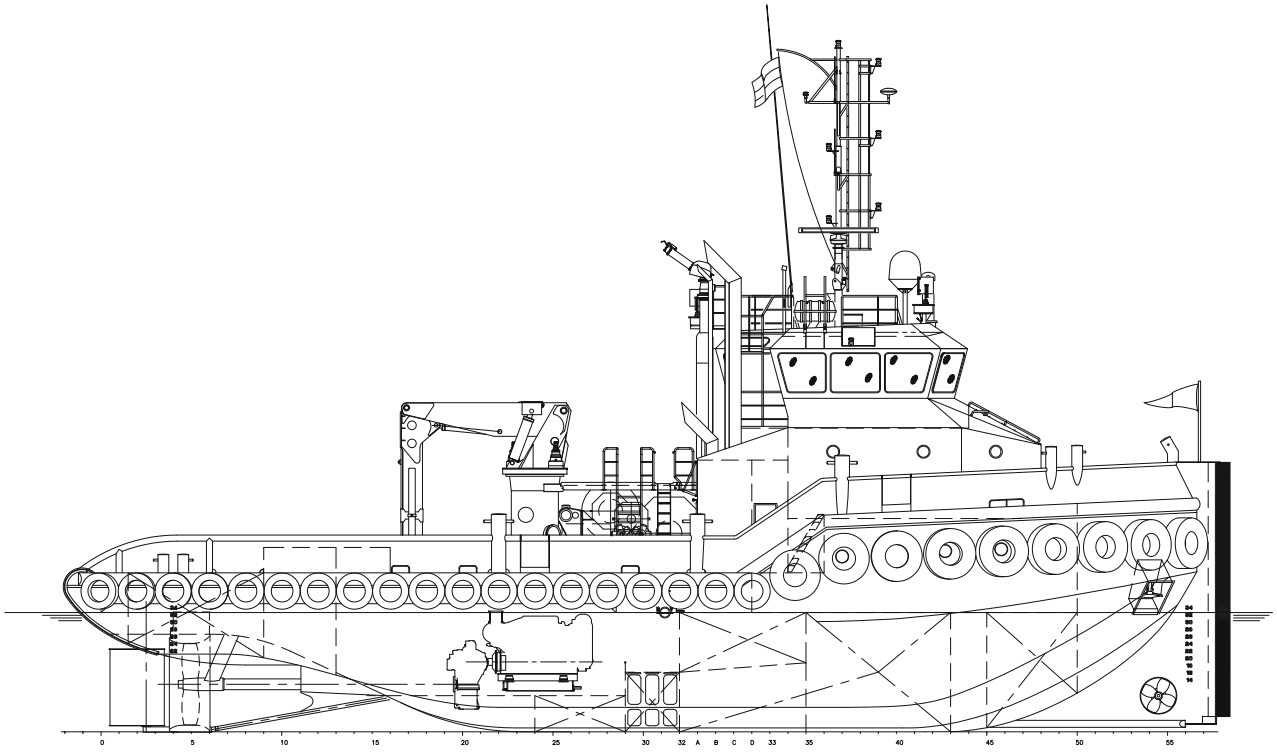

Maindeck

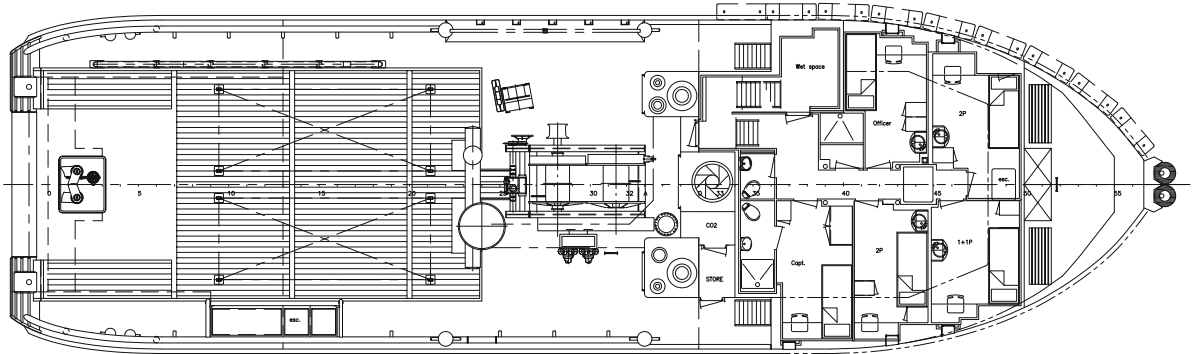

Below maindeck

